

## CE-D10HDL



EX-SDI 2.0 Indoor Mini Dome Camera



### KEY FEATURES:

- 1/2.9" SONY 2.19 Megapixel CMOS
- 1080p @ 30fps Over RG59 Coax
- 3.6mm (f2.0) Fixed Lens
- EX-SDI 2.0 / HD-SDI & HD Analog outputs
- EXHD Lite 2.0 DSP
- OSD Menu Control via Built-In Joystick (on cable)
- DC12V

### DIMENSIONS:

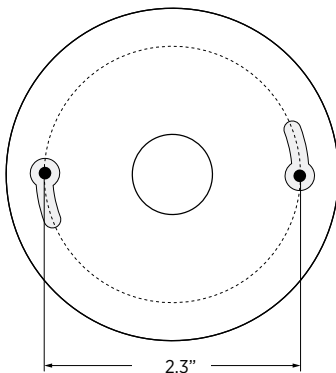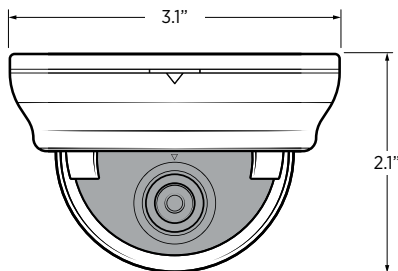

Bottom of Camera  
(Mounting Holes)

CAMERA	
Image Sensor	1/2.9" SONY 2.19 Megapixel CMOS
Resolution	Full HD 1080p - 2MP
Effective Pixels	1985 (H) x 1105 (V)
Scanning System	Progressive Scan
Frame Rate	1080p @ 30fps
Minimum Illumination	0.1 Lux
Shutter Speed	1/30 - 1/60,000 sec. / AUTO
Lens	3.6mm (f2.0) Fixed Lens
Filed of View	75° (Horizontal)
Video Output (SDI & Analog selectable)	1x EX-SDI 2.0 / EX-SDI / HD-SDI 1x HD Analog: CVBS / A_HD / C_VI / T_VI
Power Consumption	100mA (0.1A) ±10%
Power Requirement	DC12V
Operating Temperature	32°F - 113°F / 0°C - 45°C
Operating Humidity	90% RH Max.
Weather Rating	n/a - Indoor Use Only
IR LEDs	n/a
Heaters/Fan	n/a
Materials	Plastic Case w/Polycarbonate Dome
Dimensions	3.1" (Dia.) x 2.1" (H) / 79mm (Dia.) x 53.4mm(H)
Weight	0.25 lbs / 0.11 kgs

OSD	
DSP Type	EXHD - Lite 2.0
Menu Control	OSD Menu Control via Built-in Joystick
Exposure	Lens, Shutter, Sens-Up, AGC
White Balance	ATW, AWB, AWC-SET, Manual
Image Adjust	Sharpness, Gamma, Brightness, Saturation, Black Level
Backlight	HLC, BLC, WDR
Day & Night	Auto, Extern, Color, B&W
DNR (3DNR)	Off, Low, Middle, High
Special	Rotate, D-Zoom, ACE, Defog, Lens Shading, Privacy, Motion
Serial	Cam ID, Baudrate, ID Display
System	SDI Output (EX-SDI 2.0 / EX-SDI / HD-SDI), HD Analog (CVBS / A_HD / C_VI / T_VI), Frame Rate, Video System, CVBS Filter, Language, Cam Title, Reset